




# AM-600



AREC Inc. © All Rights Reserved 2017. | [www.arec.com](http://www.arec.com)  
All information contained in this document is Proprietary



Made in Taiwan  
Version: 2017-01

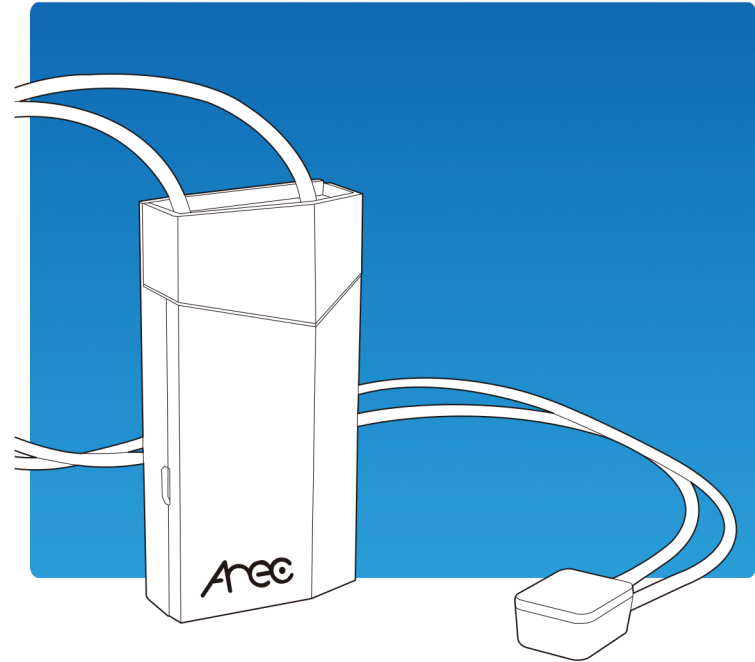


Specifications:

AM-600 Wireless microphone positioner	
Tracking Distance*	3~12m
Control buttons	Power ON/OFF and Tracking pause
	Mute
Power input	Built-in rechargeable lithium battery. 3.7V, 720mA Interface: USB Micro-B
Audio input	Ø3.5 audio input jack Built-in microphone
Working temperature	0°C~50°C
Battery life**	Approximate continuous operating time: 4hours
Dimension	83(L) x 41.5(W) x 18.15(H)mm
Weight	67g

- \* For working with TP-100 Auto tracking mount
- \*\* Power saving function: The wireless microphone positioner will automatically power off, if it has been placed flat and static for more than 5 minutes.

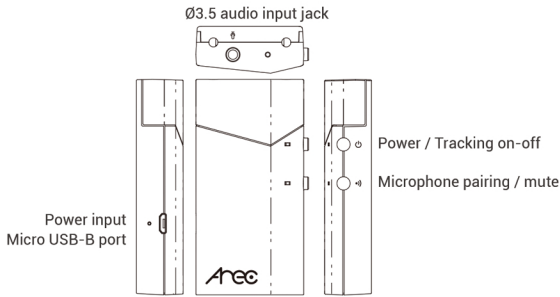


Wireless microphone positioner information



Fix your AM-600 to the target person or object properly. For better tracking effect, wear a positioner with the smooth and transparent side facing out.



Button and light indicators of wireless microphone:

Interface	Light Color	Status
 Power switch and stop tracking button	Green Red	Press and hold the button for 3 seconds to power ON / OFF the wireless microphone positioner. <ul style="list-style-type: none"><li>• Green light turns on when power is ON.</li><li>• Red light flashes when power is low.</li></ul> Press the button twice to pause / resume tracking function. <ul style="list-style-type: none"><li>• Red light is on when auto tracking function is suspended.</li></ul> Note: When the tracking function is paused, the TP-100 Auto Tracking Mount will return to the full-view position.
 Wireless microphone pairing and mute button	Blue Red	Press and hold the button for 3 seconds to pair the wireless microphone positioner with AREC Media Station*. <ul style="list-style-type: none"><li>• Blue light flashes fast during pairing.</li><li>• Blue light flashes slow after it is successfully paired and connected.</li></ul> Press the button twice to mute/unmute the wireless microphone positioner. <ul style="list-style-type: none"><li>• Red light is on, when it is muted.</li></ul> Note: The wireless microphone positioner memorizes the latest pairing result. To clear the pairing, press and hold the button for more than 10 seconds.
Micro USB port	Green	Green light is on during power charging. Light goes off when the charging is complete.
 Ø3.5 audio jack for microphone input		For external microphone

\* Models with a wireless audio receiver.