



■ Install on a wooden board

1. Refer to the dimensions information to make adequately sized holes for the body part and the screws.
2. Put the body part into the hole and use the tapping screws to secure the body in place.
3. Plug the power and USB cables to finish installation.

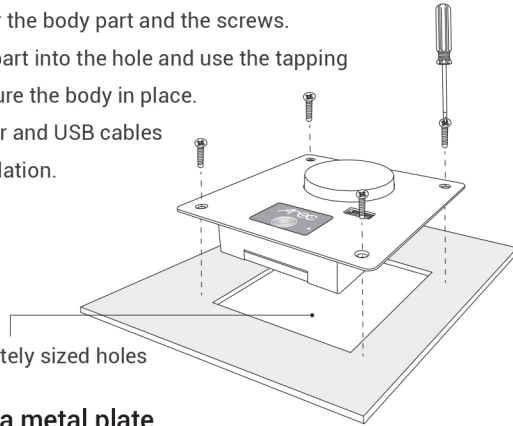


■ Install on a metal plate

1. Refer to the dimensions information to make adequately sized holes for the body part and the screws.
2. Put the body part into the hole and use the nuts & screws to secure it in place.
3. Plug the power and USB cables to finish installation.

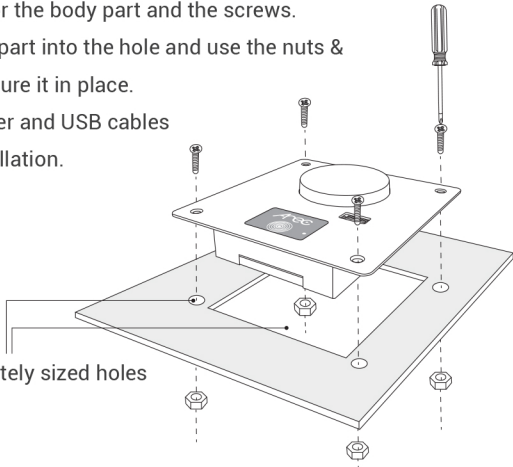

UB-01M Recording Light

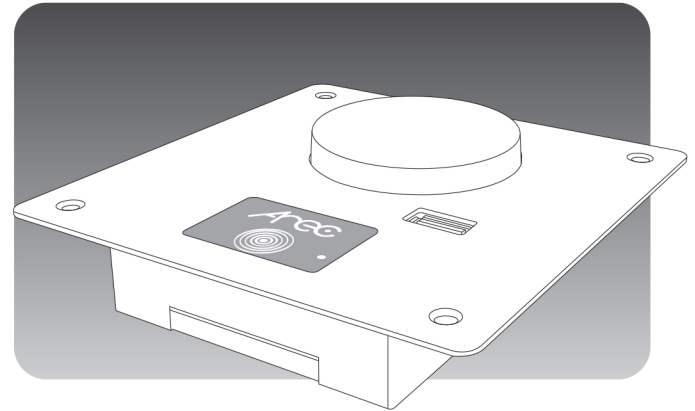

AREC Inc. © All Rights Reserved 2021. | www.arec.com


All information contained in this document is Proprietary



Made in Taiwan
Version:2021-06

AREC UB-01/ UB-01M Recording Light is compatible with all AREC LS/KL Media Stations and makes it easy for presenters to check whether the AREC Media Station is recording.

- Press the touch panel to start/stop recording.
- The indicator light turns red when the Media Station is recording.
When the recording stops, the red light will go out.
- Supports video recording and file exporting via a connected USB storage device.
- With flush-mount design, UB-01M can be easily installed on a lectern, table, or digital podium.

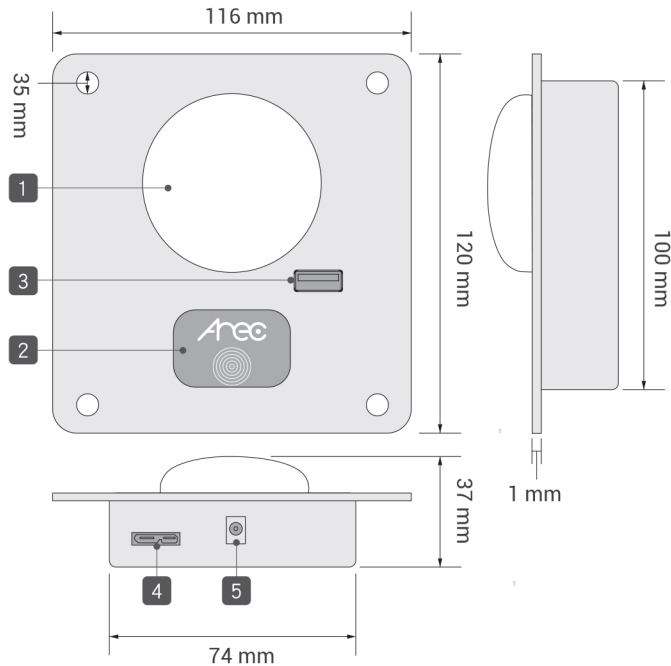

- 1 Recording Light
- 2 One-Touch Recording
- 3 Top USB Port
- 4 USB 3.0 Micro-B
- 5 Power Supply

Specifications:

Model Name	UB-01M
Recording Indicator	Compatible with AREC LS/KL Media Stations Red Light ON : Recording Red Light OFF : Recording Stopped
Touch Panel	Touch to start/stop recording
Power Supply Interface	USB2.0 ; DC-5V
USB Port	x1 USB2.0 Type-A
Video Backup & Export	Insert USB Storage, then start recording. Video files will be saved on both the embedded HDD and USB storages. Make sure the available memory space is over 8GB Select and export video MP4 files via AERC Media Station Graphic User interface
Dimension (L x W x H)	120 x 116 x 37 mm
Weight	270g