

WIREFATH

BULK WIRE

SP-CAT5E-DB-1000

U/UTP, 24AWG solid bare copper, CAT.5E, CMX outdoor, Sunlight resistant, With water-blocking tape

Features

- High performance of transmission.
- High quality of safety property.
- Sweep frequency up to 350 MHz.
- Reelex Ilcarton and easy to pull out.
- Carton with one layer corrugated design providing sufficient strength and saving packaging space.

Application

- For outdoor and direct burial use.
- Transmission of digital and analogue for data, video and audio applications. □ IEEE 802.3u 100BASE-T and legacy speeds.
- CDDI / ATM / Token Ring
- IEEE 802.3af (PoE) / IEEE 802.3at (PoE+)

Electrical Transmission

- ANSI/TIA-568-C.2 (2009)
- ISO/IEC 11801 (Edition 2.2)
- IEC 61156-5 (Edition 2.0)

Material and Construction

- UL444
- CSA 22.2 NO.214


EU Directive 2011/65/EC (RoHS2)

EU Directive 2006/95/EC (LVD)

CE compliance date: 2010.01.01

Flame Test

- UL 2556 (CMX)

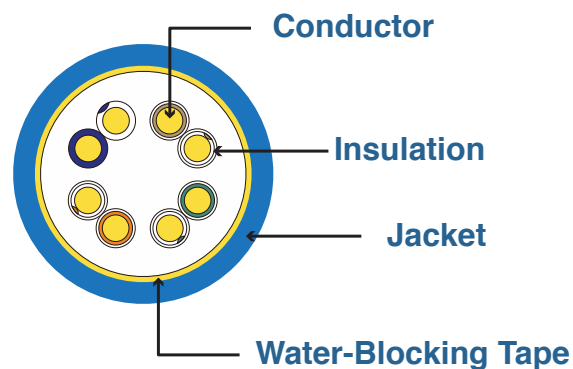

WIREFATH

BULK WIRE

Material and Construction			
Conductor	Material	24AWG solid bare copper	
Insulation	Material	Polyolefin (PO)	
	Color code & diameter	Blue & white/blue Stripe	0.92 ± 0.02 mm
		Orange & white/orange stripe	0.90 ± 0.02 mm
		Green & white/green stripe	0.92 ± 0.02 mm
Brown & white/brown stripe		0.90 ± 0.02 mm	
Shield	Material	Water-blocking tape	
Jacket	Material	Polyethylene (PE)	
	Diameter	5.7 ± 0.2 mm	
	Thickness	0.50 ± 0.05 mm	
	Color	Per customer`s request	
Marking	WirePath™ Bulk Wire by SnapAV, E325177-W C(UL)US CMX 4PAIR 24AWG 75°C DIRECT BURIAL, ANSI/TIA-568-C.2, UTP CAT5E UNSHIELDED 350MHz, DDMMYY, 0000/1000 FT ~~~ 0998/0002 FT		

Usage & Environmental Condition		
Temperature range	Storage & shipping	-20°C to 75°C
	Installation	0°C to 60°C
	Operation	-20°C to 60°C
Minimum bending radius		≥ 4 times of overall diameter
Maximum pulling tension		≤ 110 N

WIREFATH

BULK WIRE

Physical & Electrical Characteristics (at 20°C)	
Temperature & voltage rating	75°C / 300V
Spark test	2.5 KV DC
AC leakage current through overall jacket	≤ 10mA (1.5KV AC)
Cable cold bend	-20°C for 4 hr
Conductor DC resistance	≤ 9.38 Ω/100m
Resistance unbalance	≤ 5%
Dielectric strength	1.5 KV ac for 2 s
Insulation resistance	≥ 5000 MΩ·Km
Mutual capacitance	≤ 5.6 nF/100m
Capacitance unbalance pair-to-ground	≤ 330 pF/100m

Material and Construction

Frequency (MHz)	IL	NEXT	PS.NEXT	ACR	PS.ACR	ACRF	PS.ACRF	RL	Propagation Delay	Delay Skew
	Max. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Min. dB/100m	Max. ns/100m	Max. ns/100m
1	2.04	65.30	62.30	63.26	60.26	63.80	60.80	20.00	570.00	45.00
4	4.05	56.27	53.27	52.22	49.22	51.76	48.76	23.01	552.00	
8	5.77	51.75	48.75	45.99	42.99	45.74	42.74	24.52	546.73	
10	6.47	50.30	47.30	43.83	40.83	43.80	40.80	25.00	545.38	
16	8.25	47.24	44.24	38.99	35.99	39.72	36.72	25.00	543.00	
20	9.27	45.78	42.78	36.52	33.52	37.78	34.78	25.00	542.05	
25	10.42	44.33	41.33	33.91	30.91	35.84	32.84	24.32	541.20	
31.25	11.72	42.88	39.88	31.15	28.15	33.90	30.90	23.64	540.44	
62.5	16.99	38.36	35.36	21.37	18.37	27.88	24.88	21.54	538.55	
100	21.98	35.30	32.30	13.33	10.33	23.80	20.80	20.11	537.60	
150	27.54	32.66	29.66	5.11	2.11	20.28	17.28	18.87	536.94	
200	32.42	30.78	27.78	N.A.	N.A.	17.78	14.78	18.00	536.55	
250	36.85	29.33	26.33	N.A.	N.A.	15.84	12.84	17.32	536.28	
300	40.97	28.14	25.14	N.A.	N.A.	14.26	11.26	16.77	536.08	
350	44.85	27.14	24.14	N.A.	N.A.	12.92	9.92	16.30	535.92	

Values above 100MHz are for information only.