



CHOOSE BETWEEN THE LAIA T-POD QUAD 22 OR ITS PLUS OPTION, WHICH INCORPORATES A LOUDSPEAKER. BOTH PRODUCTS ARE PERFECT FOR LARGE ROOMS



Laia t-Pod Quad 22 / Plus

Laia t-Pod Quad 22 is an audio system to connect to the computer via USB. It includes 4 omnidirectional wireless microphones that connect to the base unit via radio frequency (2.4G). An active loudspeaker can be connected, as an additional external microphone. The effective pickup radius of a single omnidirectional microphone is 2m. The Laia t-Pod Quad 22 is a two-way, natural and fluid microphone, offering users a high quality experience.


The **Laia t-Pod Quad 22 PLUS** incorporates an active loudspeaker.

PROFESSIONAL WARRANTY
3 year "Prime support" warranty 24hr advanced replacement, extendable to 5 years

AUDIO CHARACTERISTICS
Digital audio processing
384ms echo cancellation technology
Intelligent dynamic noise reduction
Full duplex
360° pickup range
The effective pickup radius is 2 meters (single omnidirectional microphone)
INTERFACE
B type USB interface
6.5 mm audio jack
6.5 mm handheld microphone interface
Handheld microphone receiver charging port
Hand-held microphone volume adjustment knob
Antenna interface
DC power interface
WIRELESS OMNIDIRECTIONAL MICROPHONE
Audio bandwidth is 100-16 KHZ
Sensitivity: -38 dB SPL@1KHZ
Signal to noise ratio: 65dB 94dB SPL@1KHZ, A-weight
COMPUTERS SYSTEM REQUIRED
Windows 7 / Windows 10, MacOS
BUTTON ON MICS
Microphone mute button
Speaker mute button
Slave switch button
PLUS OPTION: ACTIVE SPEAKER
Power: mid-bass 25W*2, High pitch 10W*1
Volume: 100dB (0.5m)
Power adapter: 15V/4A
Speaker frequency response: 75HZ-20KHZ

PRODUCT PERFORMANCE STANDARDS
YD/T 993-1998
GB/T 9254/2008
GB 4843.1-2001
Master red light is always on: under normal work
MASTER LED LIGHT STATUS
The speaker status indicator on master is "on" in green: Under normal work
The speaker status indicator light on master is "on" in red: Speaker mute
SLAVE MICS LED LIGHTS STATUS
Normal work: The green light is always "on"
Mute microphone: red light is always on
Low power: the red light of the speaker flashes
Not connected normally: The green light flashes
POWER SUPPLY
Host power adapter -12V2A
Slave power adapter -5V/500mA - Supports wireless charging
ENVIRONMENTAL REQUIREMENTS
Temperature: 5°-44°
Humidity: 20-85% (no condensation)
Noise level: <48dB
Storage temperature: -10°-55°
OTHERS
Master size: 267*145*51mm
Single mic size: 110*110*25mm
Master weight: 1044g
Single mic weight: 236g

t-Pod Quad 22:

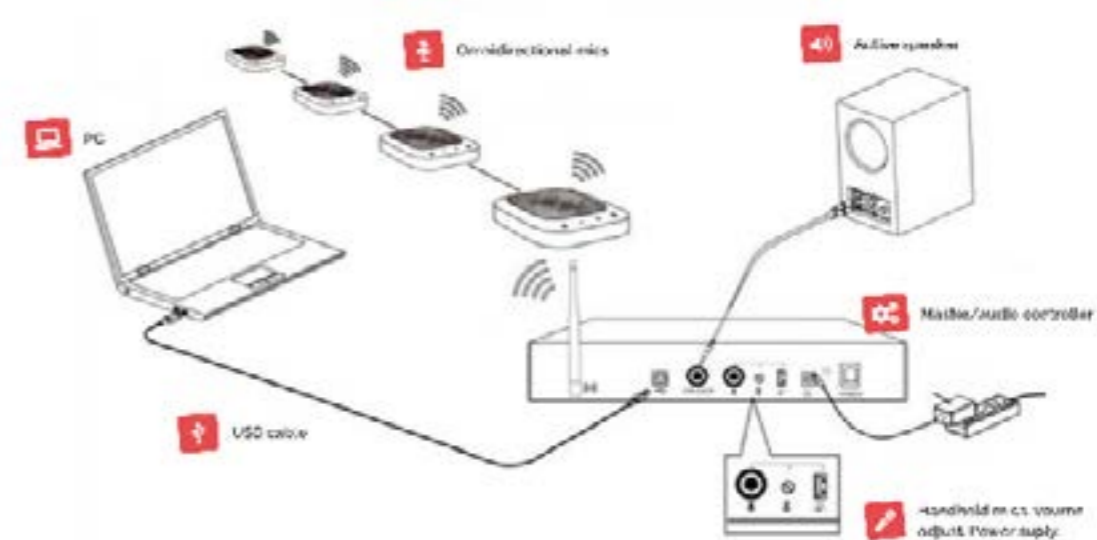

- Intelligent audio processing
- Support external active speakers
- Wireless charging possible
- Portable wireless microphone
- Supports a handheld microphone
Wireless charging microphone
- PLUS option
With built-in speakers



Headquarters:
Po. Europa, 26 Pta. 1 Of.3
S.S. de los Reyes 28703
Madrid- Spain

After-sale service:
C/Brújula, 4 Pol. Ind. PISA
41927 Mairena del Aljarafe
Sevilla - Spain

